

FWT137-10

WR-137, 10W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 5.38~8.17GHz
Average Power: 10W
VSWR: 1.03 max.



Mechanical

Waveguide Size: WR-137 (BJ70)
Flange: FDP70

Environmental

Temperature: -55~+125°C

Outline Drawings

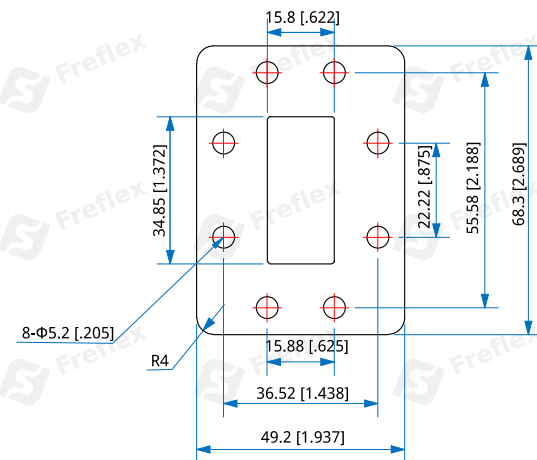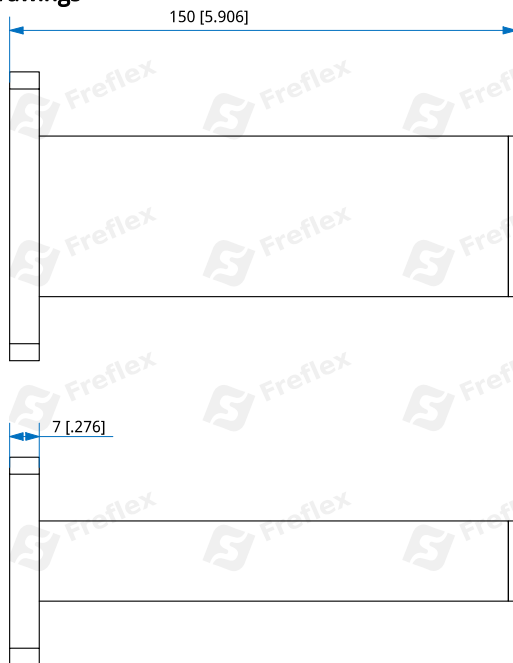

Outline A

Unit: mm [in]
Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FWT137-10-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
2 - FDP70 (Outline A)

Examples:

To order a low power waveguide termination, WR-137, 10W, Aluminum, FDP70, specify FWT137-10-A-2.

Customization is available upon request.