

FWT159-10

WR-159, 10W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 4.64~7.05GHz
Average Power: 10W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-159 (BJ58)
Flange: FDP58

Environmental

Temperature: -55~+125°C

Outline Drawings

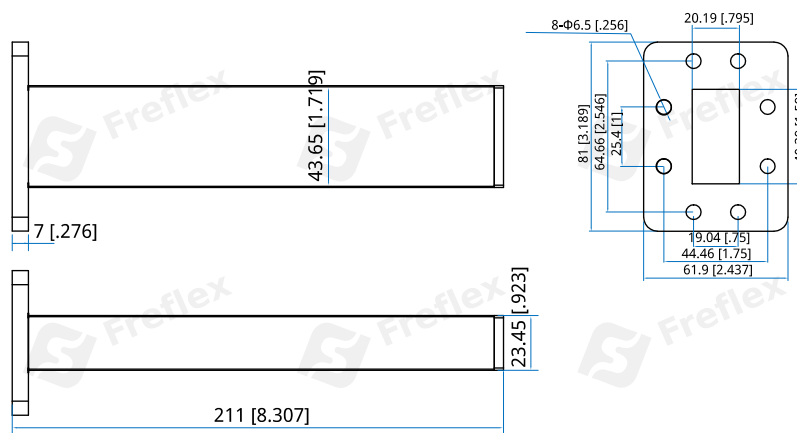

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWT159-10-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2 - FDP58 (Outline A)

Examples:

To order a low power waveguide termination, WR-159, 10W, Aluminum, FDP58, specify FWT159-10-A-2.

Customization is available upon request.