

FWT28-2

WR-28, 2W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 26.3~40GHz
Average Power: 2W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-28 (BJ320)
Flange: FBP320

Environmental

Temperature: -55~+125°C

Outline Drawings

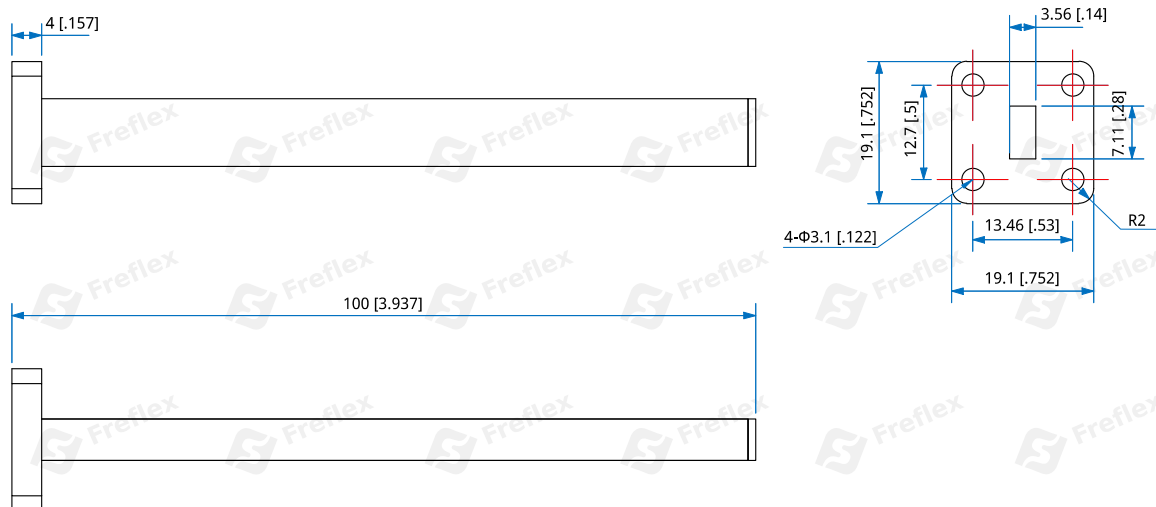

Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FWT28-2-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
1 - FBP320 (Outline A)

Examples:
To order a low power waveguide termination, WR-28, 2W, Aluminum, FBP320, specify FWT28-2-A-1.

Customization is available upon request.