

FWT284-15

WR-284, 15W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 2.6~3.95GHz
Average Power: 15W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-284 (BJ32)
Flange: FDP32

Environmental

Temperature: -55~+125°C

Outline Drawings

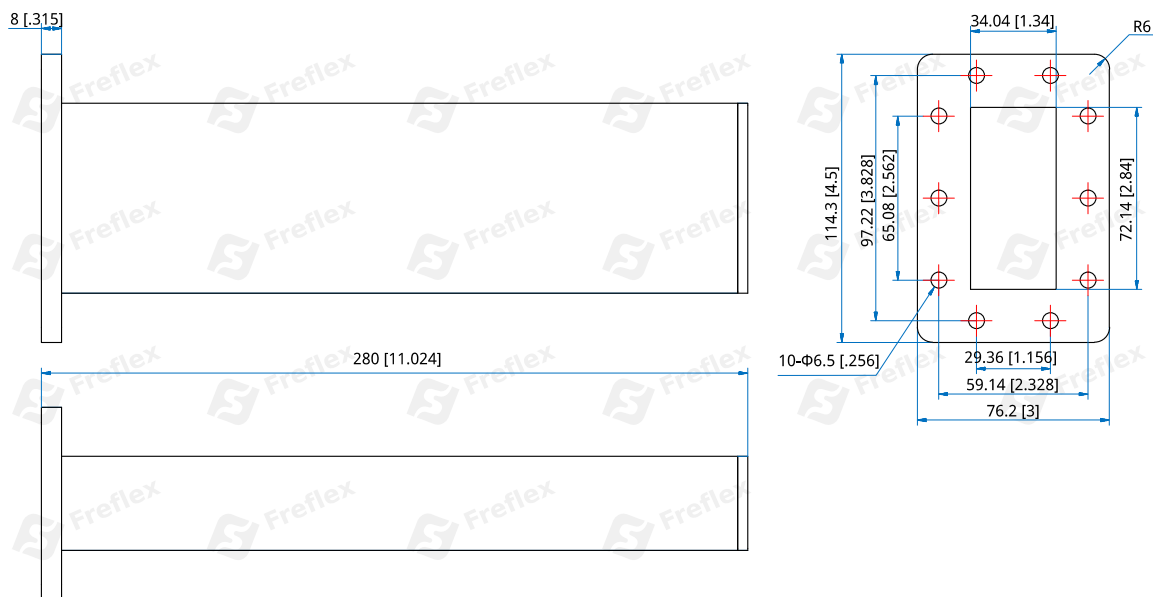

Outline A

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWT284-15-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:

2 - FDP32 (Outline A)

Examples:

To order a low power waveguide termination, WR-284, 15W, Aluminum, FDP32, specify FWT284-15-A-2.

Customization is available upon request.