

FWT3-R3

WR-3, 0.3W

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency:	217~330GHz
Average Power	0.3W
VSWR:	1.25 max.

Mechanical

Interface:	WR-3 (BJ2600)
Flange:	FUGP2600
Material:	Gold plated copper

How To Order

FWT3-R3-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


15 - FUGP (Outline A)

Examples:

To order a low power waveguide termination, WR-3, 0.3W, Copper, FUGP2600, specify FWT3-R3-C-15.

Customization is available upon request.

Outline Drawings

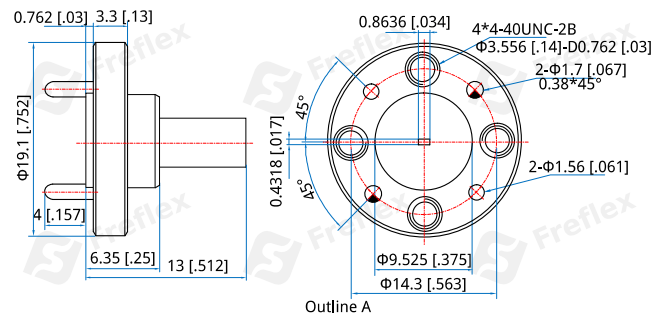

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]