

FWT340-15

WR-340, 15W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 2.17~3.3GHz
Average Power: 15W
VSWR: 1.03 max.



Mechanical

Waveguide Size: WR-340 (BJ26)
Flange: FDP26

Environmental

Temperature: -55~+125°C

Outline Drawings

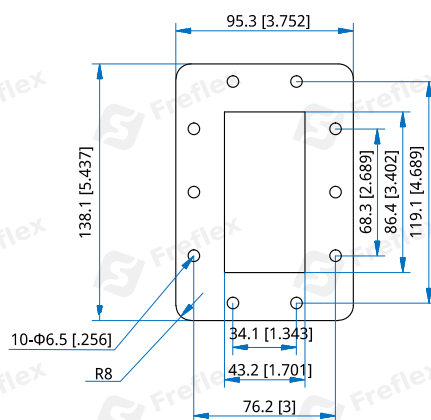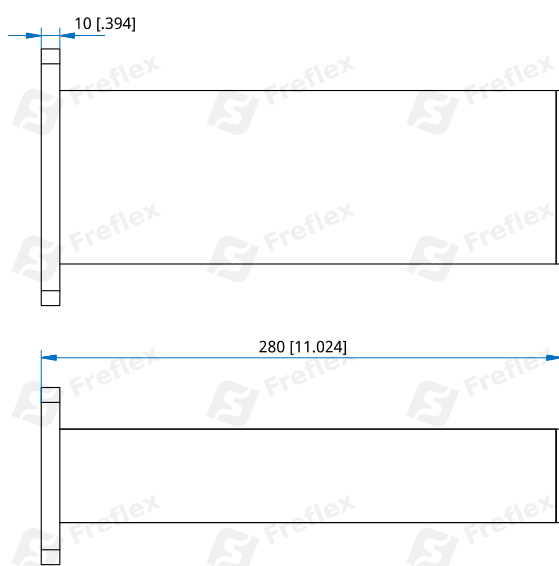

Outline A

Unit: mm [in]
Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FWT340-15-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:

2 - FDP26 (Outline A)

Examples:

To order a low power waveguide termination, WR-340, 15W, Aluminum, FDP26, specify FWT340-15-A-2.

Customization is available upon request.