

FWT42-2

WR-42, 2W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 17.6~26.7GHz
Average Power: 2W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-42 (BJ220)
Flange: FBP220

Environmental

Temperature: -55~+125°C

Outline Drawings

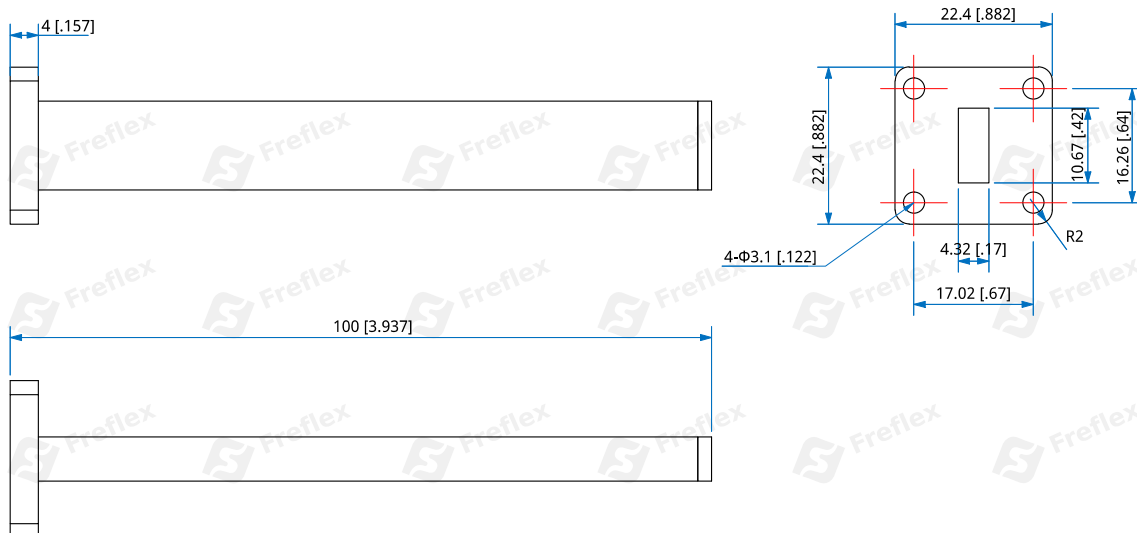

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FWT42-2-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP220 (Outline A)

Examples:

To order a low power waveguide termination, WR-42, 2W, Aluminum, FBP220, specify FWT42-2-A-1.

Customization is available upon request.