

FWT510-20

WR-510, 20W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 1.45~2.22GHz
Average Power: 20W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-510 (BJ18)
Flange: FDP18

Environmental

Temperature: -55~+125°C

Outline Drawings

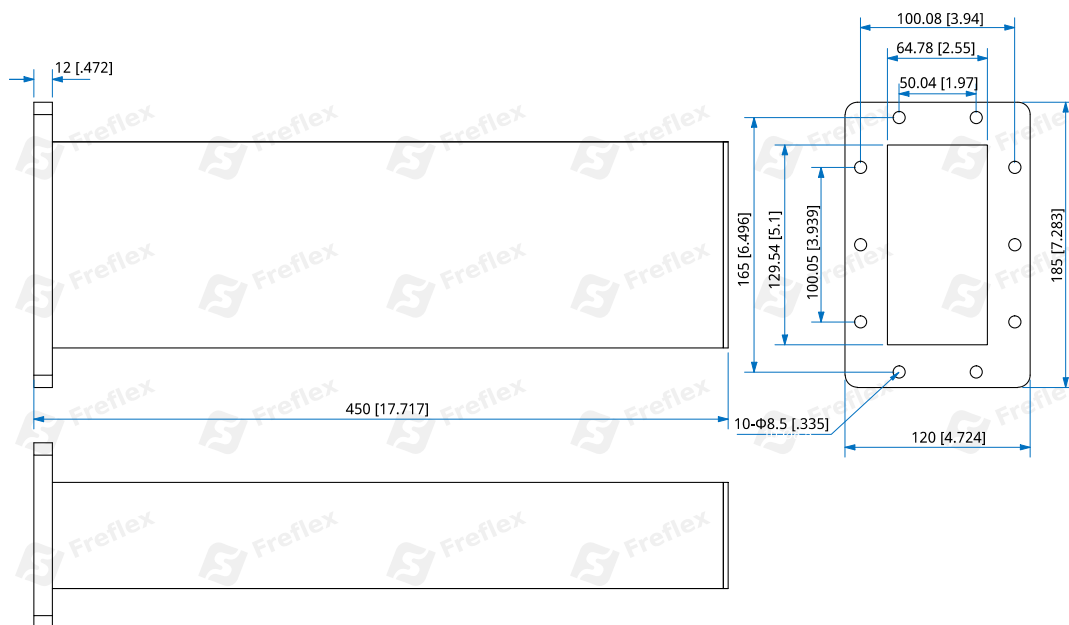

Outline A

Unit: mm [in]
Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FWT510-20-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)
Flange naming rules:

2 - FDP18 (Outline A)

Examples:
To order a low power waveguide termination, WR-510, 20W, Aluminum, FDP18, specify FWT510-20-A-2.

Customization is available upon request.