

FWT75-5 WR-75, 5W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 9.84~15GHz
Average Power: 5W
VSWR: 1.03 max.

Mechanical

Waveguide Size: WR-75 (BJ120)
Flange: FBP120

How To Order

FWT75-2-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP120 (Outline A)

Examples:


To order a low power waveguide termination, WR-75, 5W, Aluminum, FBP120, specify FWT75-5-A-1.

Customization is available upon request.

Environmental

Temperature: -55~+125°C

Outline Drawings

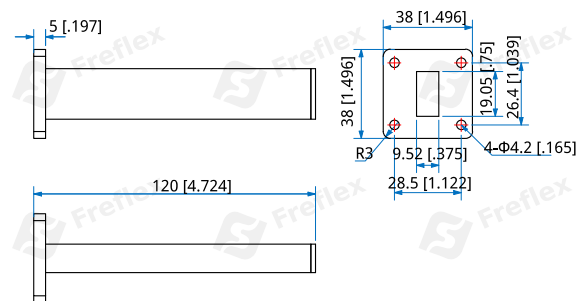

Outline A

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]