

## FBMT50-2 50W

### Features:

- \* Low VSWR
- \* Broadband

### Applications:

- \* Transmitters
- \* Antennas
- \* Laboratory Test
- \* Impedance Matching

### Electrical

Frequency Range:	0.1~0.715GHz
Average Power <sup>*1</sup> :	50W@25°C
VSWR:	4±0.3

[1] Derated linearly to 5W@125°C.

### Mechanical

Size <sup>*2</sup> :	60*60*80mm 2.362*2.362*3.15in
Connector:	N Male

[2] Exclude connectors.

### Environmental


Temperature:	-55~+125°C
--------------	------------

### How To Order

**FBMT50-100-715-4-N**

Customization is available upon request.

### Outline Drawings

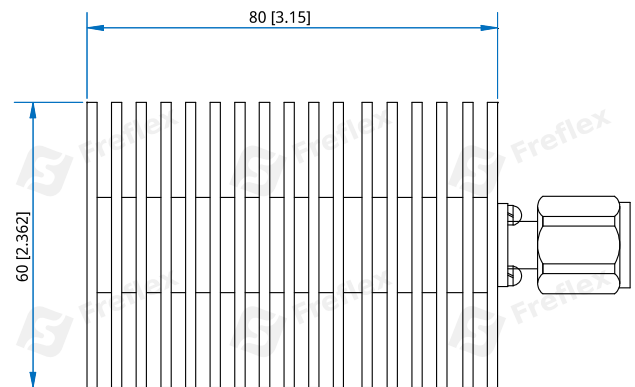

Unit: mm [in]

Tolerance: ±3%

### Expain:

If necessary, the product needs to be air-cooled to assist in heat dissipation.