



FC-8-FA-086-1

DC~40GHz, Female, Panel Mount

Features: Applications:
* Low VSWR * Wireless
* Radar

* Instruments

* Electronics



Electrical

Frequency: DC~40GHz Impedance: 50Ω VSWR: 1.25 typ.

Mechanical

Mating Cable: QA220, QH280, QK086, QF086,

QE086, QD086

Mating Cable Connector: FC-8-MA-086-1

Conductor: Black anodizing of aluminum

Connector Gender: Female

Mounting Type: Panel mount

Environmental


Temperature: -40~+125°C

How To Order

FC-8-FA-086-1

Customization is available upon request.

Outline Drawings

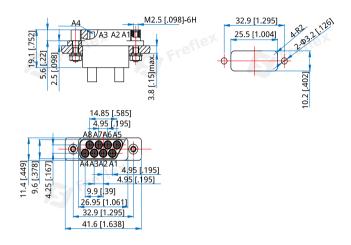

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1