


## FC-8-MA-086-1

DC~40GHz, Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



### Electrical

Frequency: DC~40GHz  
Impedance: 50Ω  
VSWR: 1.25 typ.

### Mechanical

Mating Cable: QA220, QH280, QK086, QF086, QE086, QD086  
Mating Cable Connector: FC-8-FA-086-1  
Conductor: Black anodizing of aluminum  
Connector Gender: Male

### Environmental


Temperature: -40~+125°C

### How To Order

**FC-8-MA-086-1**

Customization is available upon request.

### Outline Drawings

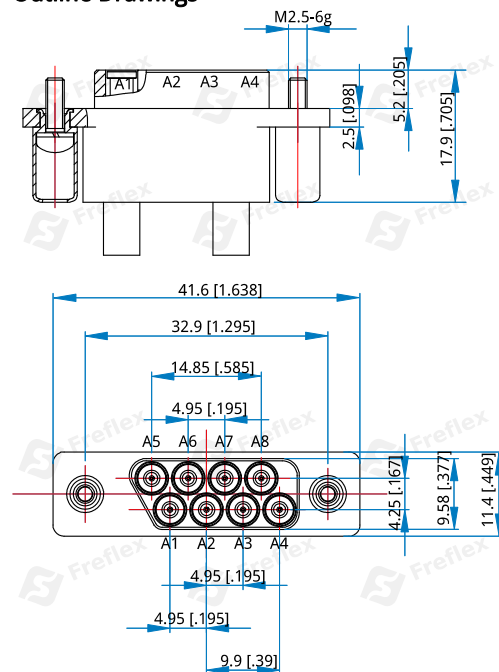

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]