


FC-8-MK-086-2

DC~67GHz, Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

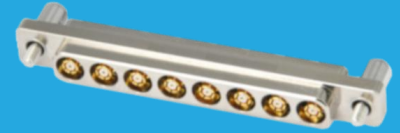

Electrical

Frequency: DC~67GHz
Impedance: 50Ω
VSWR: 1.25 typ. @DC~40GHz

Mechanical

Mating Cable: QA220, QH280, QK086, QF086,
QE086, QD086
Mating PCB connector: FC-8-FRB-01
Conductor: Chemical nickel
Connector Gender: Male

Environmental


Temperature: -55~+85°C

How To Order

FC-8-MK-086-2

Customization is available upon request.

Outline Drawings

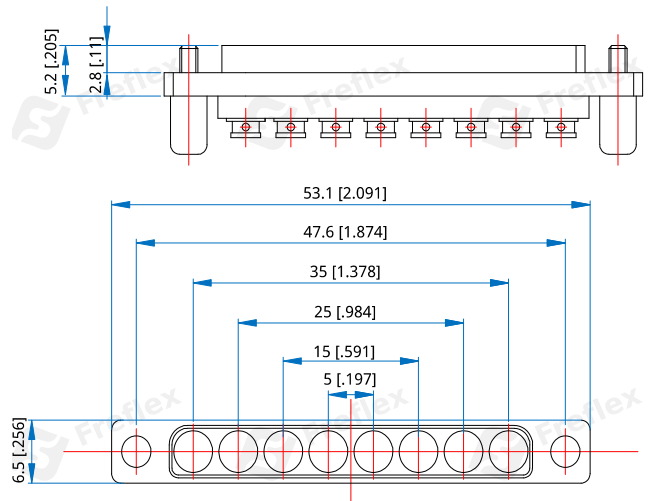

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]