

## FMP2-0-40000-2

DC~26GHz, 26~40GHz

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Transceivers
- \* Instrumentation

**Electrical**

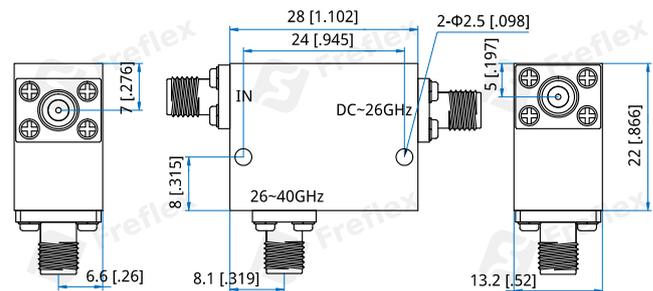
Channel 1 (L):	DC~26GHz
Channel 2 (H):	26~40GHz
Passband Insertion Loss:	2.5dB max.
Crossover Frequency:	26GHz typ.
Crossover Loss:	6dB max.
Rejection (L):	40dB min. @30~40GHz
Rejection (H):	40dB min. @DC~22GHz
VSWR:	2.5 max.
Input power:	1W max.
Impedance:	50Ω

**Mechanical**

RF Connectors:	2.92mm female
----------------	---------------

**Environmental**

Operating Temperature:	-40~+70°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**
**FMP2-0-40000-2**

Customization is available upon request.