

# FMP2-100-6000-1

0.1~3GHz, 3.3~6GHz

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Transceivers
- \* Instrumentation

**Electrical**

Channel 1 (L):	0.1~3GHz
Channel 2 (H):	3.3~6GHz
Passband Insertion Loss:	1dB max.
Rejection (L):	30dB min. @3.3~6GHz
Rejection (H):	30dB min. @0.1~3GHz
VSWR:	2 max.
Input Power:	10W max.
Impedance:	50Ω

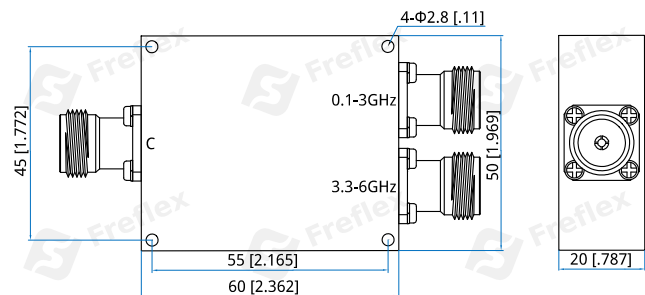
**Mechanical**

Size <sup>*1</sup> :	60*50*20mm 2.362*1.969*0.787in
RF Connectors:	N female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+80°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**FMP2-100-6000-1**

Customization is available upon request.