



# **FOEWP28-7**

26.3~40GHz, WR-28, 7dB

Features: \* Broadband Applications:
\* Wireless
\* Transceiver

\* Transceiver
\* Laboratory Test
\* Broadcast

### **Electrical**

Frequency: 26.3~40GHz

Gain: 7dB VSWR: 2 max.

#### Mechanical

Interface: WR-28 (BJ320)

Material: Copper

Finish: Pickling passivation


Flange: FBP320

### **How To Order**

### FOEWP28-7

Customization is available upon request.

## **Outline Drawings**

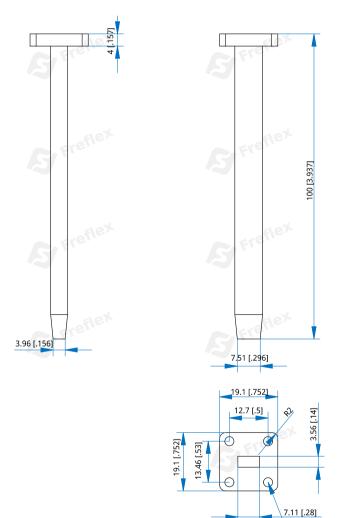

4-Ф3.1 [.122]

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1