

FPA-1000-6000-48-47S

1~6GHz, 48dB, 47dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	1~6GHz
Small Signal Gain:	48dB min.
Gain Flatness:	4±1dB max.
Input VSWR:	2 max.
Output Power (Psat):	47dBm min.
Input Power:	2±2dBm
	+6dBm max.
Spurious:	-65dBc max.
Harmonic:	-10dBc max.
Voltage:	28V/15A VCC
	+30V max.
PTT:	5V (On)
Current:	8~11A max.
Impedance:	50Ω

Mechanical

Size ^{*1} :	227.5*99.5*27.5mm
	8.957*3.917*1.083in
RF In Connectors:	SMA Female
RF Out Connectors:	SMA Female
Mounting:	8-Φ3.5mm through-hole
Power Supply Interface ^{*2} :	Feed Through/Terminal Post


[1] Exclude connectors.

[2] The amplifier test requires the installation of a heat sink.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings

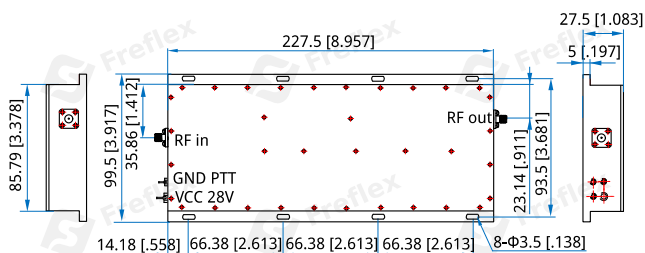

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPA-1000-6000-48-47S

Customization is available upon request.