

FPA-18000-40000-30-23S

18~40GHz, 30dB, 23dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	18~40GHz
Gain:	30dB min.
Gain Flatness:	±2.5dB typ.
Output Power (Psat):	23dBm min.
Noise Figure:	4dB typ.
Spurious:	-60dBc max.
VSWR:	2.5 typ.
Voltage:	+12V DC
Current:	600mA typ.
Input Power:	+5dBm max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	61*45*15mm 2.402*1.772*0.591in
Weight:	300g max.
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

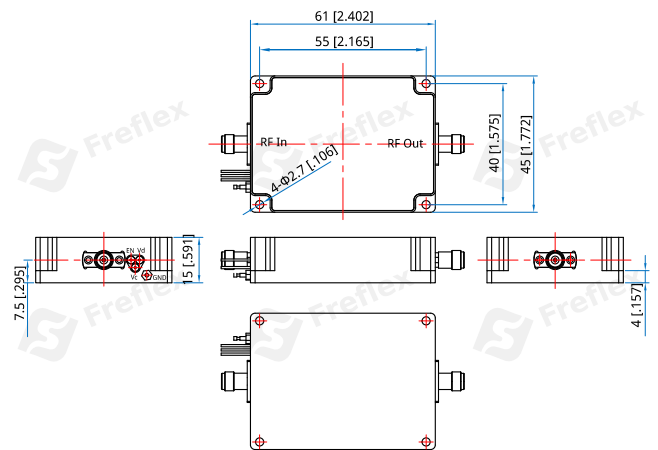

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPA-18000-40000-30-23S

Customization is available upon request.