

FPA-30-500-32-37S

0.03~0.5GHz, 32dB, 37dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	0.03~0.5GHz
Gain:	32dB min.
Gain Flatness:	±1.5dB typ.
Output Power (Psat):	37dBm min.
Spurious:	-70dBc max.
VSWR:	2 max.
Voltage:	+12V DC
Current:	1.5A typ.
Input Power:	8dBm max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	80*50*20mm 2.953*0.709*0.472in
RF Connectors:	SMA Female
Power Supply Interface:	Feed Through/Terminal Post
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+50°C
------------------------	-----------

Outline Drawings

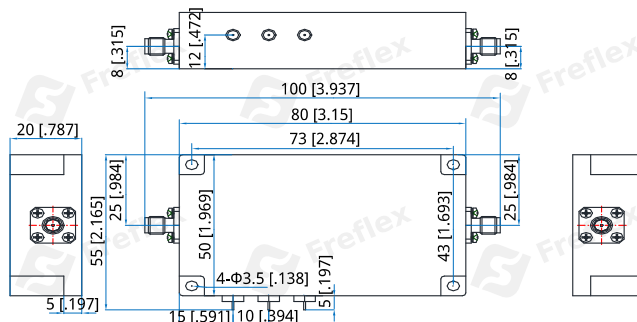

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPA-30-500-32-37S

Customization is available upon request.