

FPA-40000-60000-25-26S

40~60GHz, 25dB, 26dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	40~60GHz
Small Signal Gain:	25dB typ.
Output Power (Psat):	26dBm min.
VSWR:	2 typ.
Voltage:	25V DC
Current:	3000mA typ.
Input Power:	30dBm max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	55*31*35mm 2.165*1.22*1.378in
Interface:	WR19 (BJ500)
Mounting:	4-M2mm depth 4mm

[1] Exclude connectors.

Environmental

Operating Temperature:	10~+40°C
Non-operating Temperature:	0~+50°C

Outline Drawings

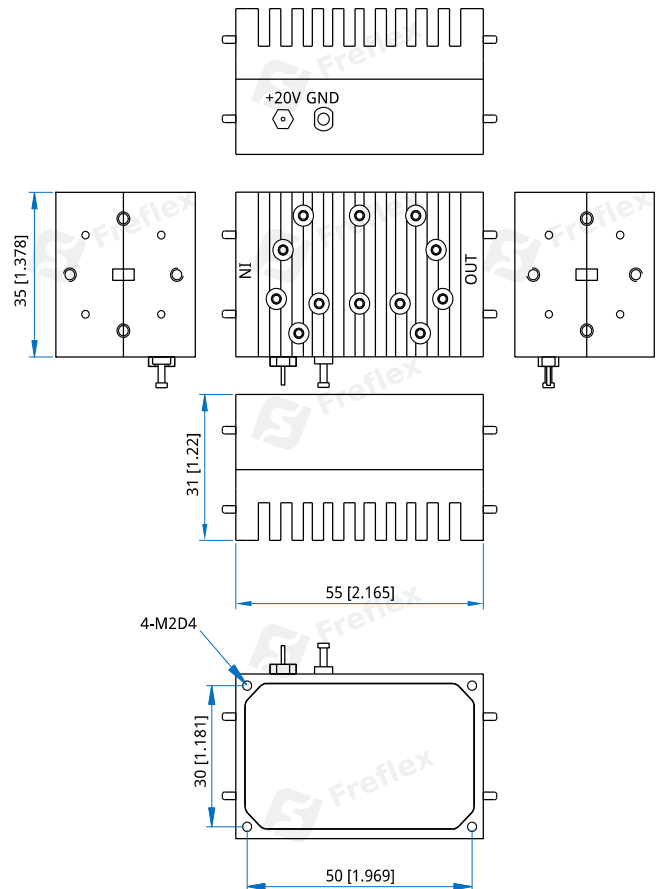

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPA-40000-60000-25-26S

Customization is available upon request.