

FPA-500-600-53-54.8S

0.5~0.6GHz, 53dB, 54.8dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	0.5~0.6GHz
Gain:	53dB min.
Gain Flatness:	3±1dB max.
Input VSWR:	1.8 max.
Output Power (Psat):	54.8dBm min.
Input Power:	3±1dBm +10dBm max.
Spurious:	-65dBc max.
Harmonic:	-18dBc max.
Voltage:	36V/35A VCC
Current:	31A max
PTT:	5V (Off)
Impedance:	50Ω

Mechanical


Size*1:	358.5*150.5*33.5mm 14.114*5.925*1.319in
RF In Connectors:	SMA Female
RF Out Connectors:	N Female
Mounting:	8-Φ3.6mm through-hole
Power Supply Interface:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings

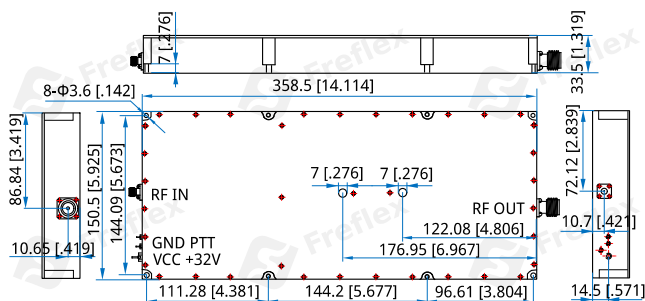

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPA-500-600-53-54.8S

Customization is available upon request.