

FPA-61000-65000-18-26S

61~65GHz, 18dB, 26dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	61~65GHz
Gain:	18dB typ.
Gain Flatness:	±1.0dB typ.
Output Power (Psat):	26dBm min.
Output Power (P1dB):	23dBm min.
Input VSWR:	2.0 typ.
Output VSWR:	2.0 typ.
Voltage:	+5V DC (+4.8V min., +5.5V max.)
Current:	2A typ.
Input Power Without Damage:	15 dBm max.

Mechanical


Size ^{*1} :	100*80*19mm 3.937*3.15*0.748in
Weight:	500g max.
Interface:	WR-15
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Aluminum
Cooling:	External Heatsink (supplied on request only)

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

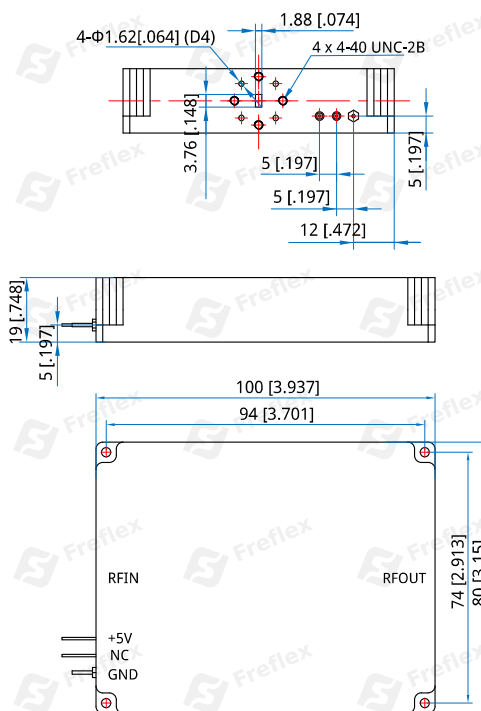

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPA-61000-65000-18-26S

Customization is available upon request.