

## FPA-800-4200-47-46.5S

800~4200MHz, 47dB, 46.5dBm

### Features:

- \* Small Size
- \* Low Power Consumption

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test

### Electrical

Frequency:	800~4200MHz
Power Gain:	47dB typ.
Gain Flatness:	±2.5dB typ.
Output Power (Psat):	46.5dBm min.
Spurious:	-60dBc typ.
	DC~10GHz@Psat=47dBm
2 <sup>th</sup> Harmonic:	-15dBc typ.@Psat=43dBm
Input VSWR:	2 max.
Output VSWR:	2 typ.
Voltage:	+32V DC max.
Input Power:	+5dBm max.

### Mechanical


Size <sup>*1</sup> :	198*88*25mm
	7.795*3.465*0.984in
RF In Connectors:	SMA female
RF Out Connectors:	N female
Power Supply Interface:	Feed through
Mounting:	6-Φ3.2mm through-hole
Cooling:	Forced Air

[1] Exclude connectors.

### Environmental

Operating Temperature:	-10~+50°C
------------------------	-----------

### Outline Drawings

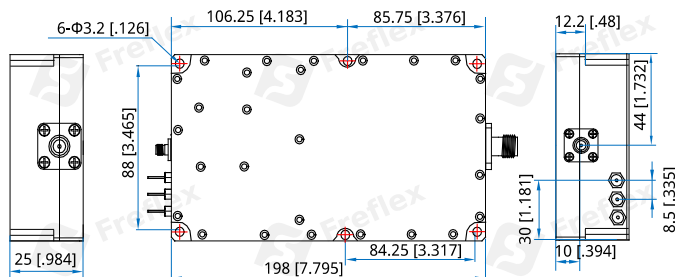

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FPA-800-4200-47-46.5S**

Customization is available upon request.