

FCM-FB-B95-01

MCX Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.35 max.
Impedance of Dielectric:	1000M Ω min.
Voltage Withstand:	750V RMS min.
Impedance:	50 Ω


Mechanical

RF Connector:	MCX Female
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-65~+165°C
--------------	------------

Outline Drawings

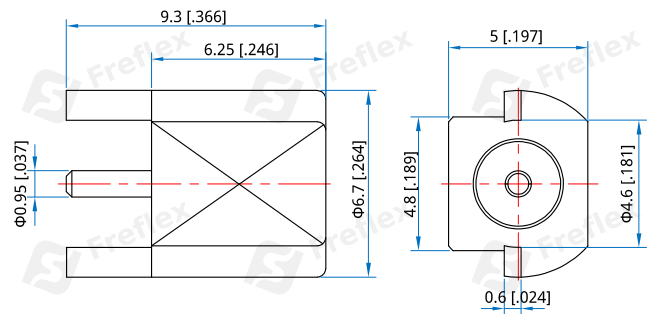

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

FCM-FB-B95-01

Customization is available upon request.