

FWRJ1-2600-X-I-C

Single Channel, 1.7~2.6GHz, Xmm, I-type

Features:

- * Low VSWR
- * Low VSWR Flatness
- * Low Insertion Loss Flatness

Applications:

- * High Speed Digital Signal Transmission
- * Analog Signal Transmission

Electrical

Frequency:	1.7~2.6GHz
VSWR:	1.25 max.
VSWR Flatness:	0.1dB max.
Insertion Loss:	0.2dB max.
Insertion Loss Flatness:	0.05dB max.
Repetition Frequency:	20Hz
Phase Balance:	±3°
Average Power:	3200W max.
Peak Power:	2GW max. (8ns pulse width)
IP Grade:	IP41


Mechanical

Interface:	WR-430 (BJ22)
Flange:	FDP22
Material:	Copper alloy
Rotating Speed:	20RPM max.
Starting Torque:	1Nm max.
Rated Continuous Torque:	0.8Nm max.
Operation Life:	3M cycles min.
Style:	I-type

Environmental

Temperature:	-40~+60°C
Operating Humidity:	95% max.

Outline Drawings

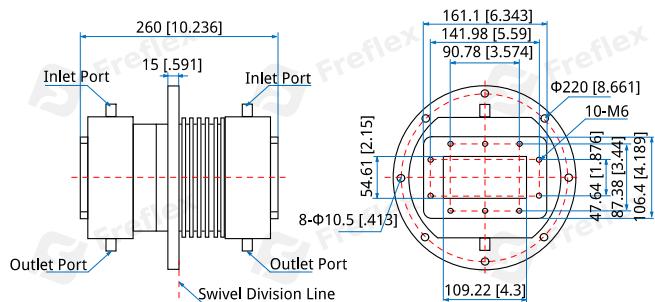

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FWRJ1-2600-X-I-C

Customization is available upon request.