

## FWRJ2-27600-26-U-A

Channel 1, 25.1~27.6GHz, Channel 2, 25.1~27.6GHz, 26mm, U-type

### Features:

- \* Low VSWR
- \* Low VSWR Flatness
- \* Low Insertion Loss Flatness

### Applications:

- \* High Speed Digital Signal Transmission
- \* Analog Signal Transmission

### Electrical

Frequency:	25.1~27.6GHz
VSWR:	1.5 max.
VSWR Flatness:	0.2 max.
Insertion Loss:	0.5dB max.
Insertion Loss Flatness:	0.1dB max.
Average Power:	100W max.
Peak Power:	500W
IP Grade:	IP40

### Mechanical

Interface:	WR-34 (BJ260)
Flange:	FBP260
Rotating Speed:	60RPM max
Torque:	0.3Nm max
Operation Life:	10M Cycles min.
Material:	Aluminium
Style:	U-type

### Environmental


Operating Temperature:	-55~+125°C
Operating Humidity:	95% max.

### How To Order

**FWRJ2-27600-26-U-A**

Customization is available upon request.

### Outline Drawings

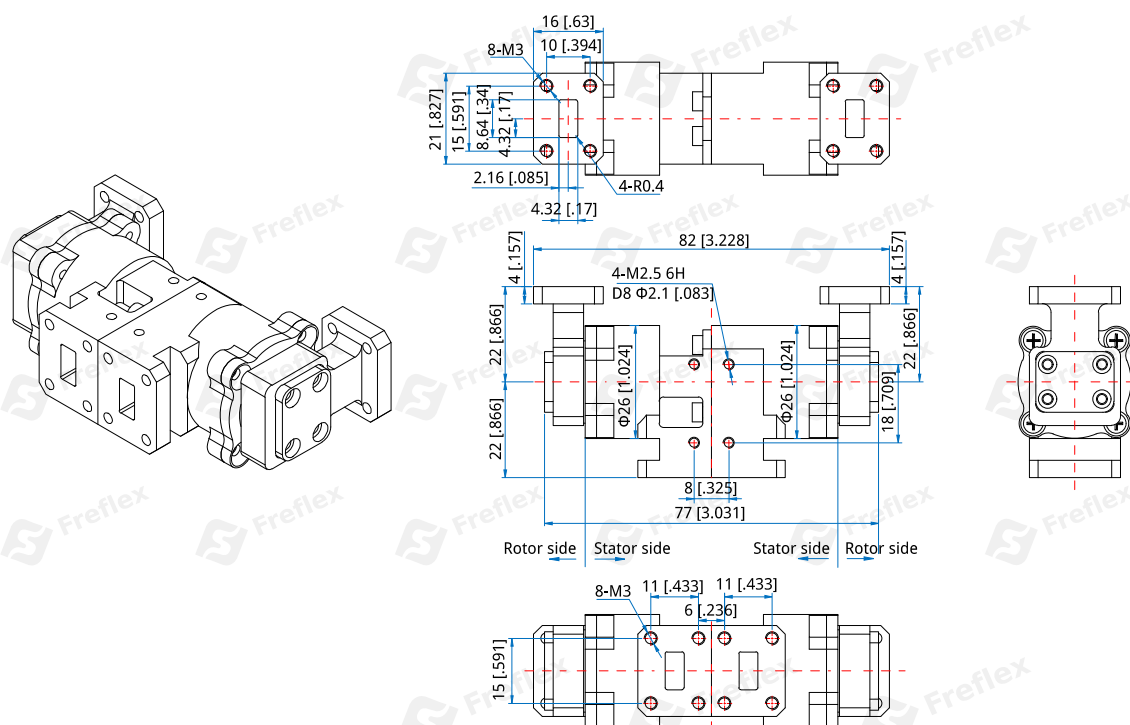

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]