

FSDBC-17600-26700

17.6~26.7GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	17.6~26.7GHz
Coupling:	10±1, 20±0.75, 40±1dB
VSWR (Mainline):	1.1 max.
VSWR (Coupling):	1.25 max.
Directivity:	30dB min.
Power Handling:	0.066MW

Mechanical

Interface:	WR-42 (BJ220)
Flange:	FBP220
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint
	Gray paint (Outline C)

Environmental

Operating Temperature:	-40~+125°C
------------------------	------------

How To Order

FSDBC-17600-26700-W-X-Y-Z

W: Coupling (20dB - Outline A, 40dB - Outline B, 10dB - Outline C)

X: Coupling Connector type

Y: Material

Z: Flange type

Connector naming rules:

42 - WR-42 (Outline A)

K - 2.92mm female (Outline B, C)

Material naming rules:

A - Aluminium (Outline A, B, C)

Flange naming rules:


1 - FBP (Outline A, B, C)

Examples:

To order a Single Directional Broadwall Coupler, 17.6~26.7GHz, 40dB, 2.92mm female, Aluminium, FBP220, specify FSDBC-17600-26700-40-K-A-1.

Customization is available upon request.

Outline Drawings

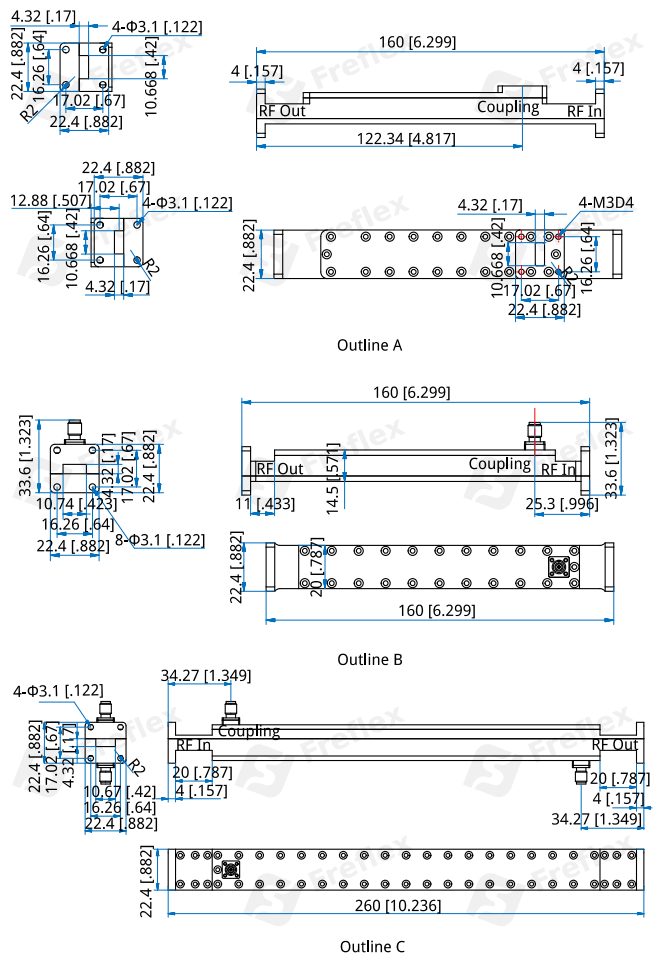

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]