

FSDBC-2600-7800

2.6~7.8GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2.6~7.8GHz
Coupling:	60±1.5dB
VSWR (Mainline):	1.1 max.
VSWR (Coupline):	1.3 max.
Directivity:	20dB min.
Power Handling:	2000W max.


Mechanical

Interface:	WRD-250
Flange:	FPWRD250
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint

Environmental

Operating Temperature:	-40~+125°C
------------------------	------------

Outline Drawings

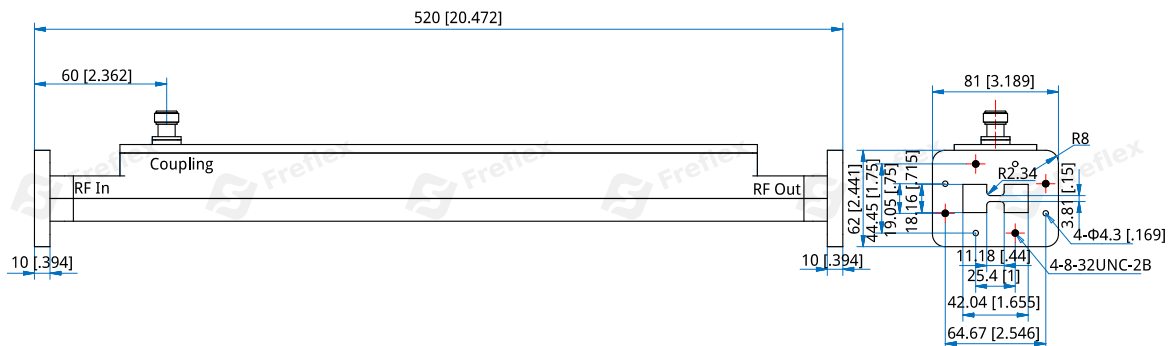

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FSDBC-2600-7800-W-X-Y-Z

W: Coupling:

60 - Outline A

X: Coupling Connector type

Y: Material

Z: Flange type

Connector naming rules:

N - N female (Outline A)

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

8 - FPWRD (Outline A)

Examples:

To order a Single Directional Broadwall Coupler, 2.6~7.8GHz, 60dB, N female, Aluminium, FPWRD250, specify FSDBC-2600-7800-60-N-A-8.

Customization is available upon request.