

## FSDC-0.003-100-1-10-S

0.003~100MHz, 1W, 10dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	0.003~100MHz
Insertion Loss:	1.6dB max.
Coupling:	10±1dB
VSWR (Mainline):	1.35max.
VSWR (Coupling):	1.35max.
Average Power:	1W

### Mechanical

Size <sup>*1</sup> :	32*32*10mm 1.26*1.26*0.394in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole


[1] Exclude connectors.

### How To Order

**FSDC-0.003-100-1-10-S**

Customization is available upon request.

### Outline Drawings

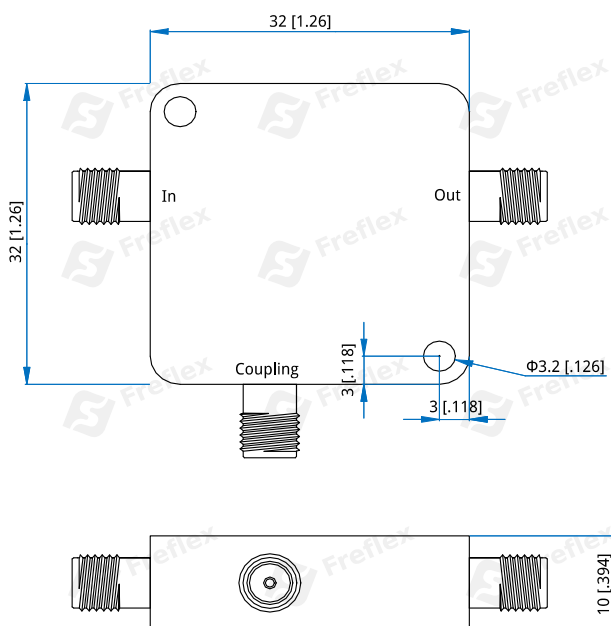

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]