

## FSDC-0.009-400-K5-50-NS

9KHz~400MHz, 500W, 50dB

### Features:

\* Low Insertion Loss

### Applications:

\* Amplifiers  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency:	9KHz~400MHz
Insertion Loss:	0.6dB max.
Flatness:	±2dB max.
Coupling:	50±2dB
Directivity:	16dB min.
VSWR(Mainline):	1.2 max.
Average Power:	500W

### Mechanical


Size*1:	120*55.9*30mm 4.724*2.201*1.181in
RF Connectors:	N Female
Coupling Connectors:	SMA female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

### Environmental

Temperature:	-40~+85°C
--------------	-----------

### Outline Drawings

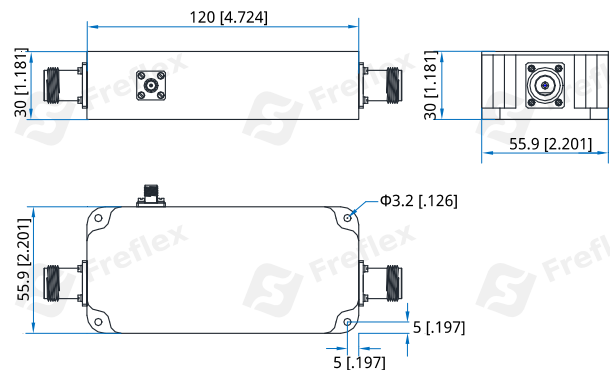

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FSDC-0.009-400-K5-50-NS**

Customization is available upon request.