

## FSDC-10-500-50-30-NS

10~500MHz, 50W, 30dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	10~500MHz
Insertion Loss:	0.7dB max.
Coupling:	30±1dB
Directivity:	20dB
VSWR(Mainline):	1.3 max.
Average Power:	50W

### Mechanical

Size <sup>*1</sup> :	50.8*50.8*22.35mm 2*2*0.88in
Connectors:	N Female, SMA Female
Mounting:	2-Φ3.2mm through hole

[1] Exclude connectors and terminations.

### Outline Drawings

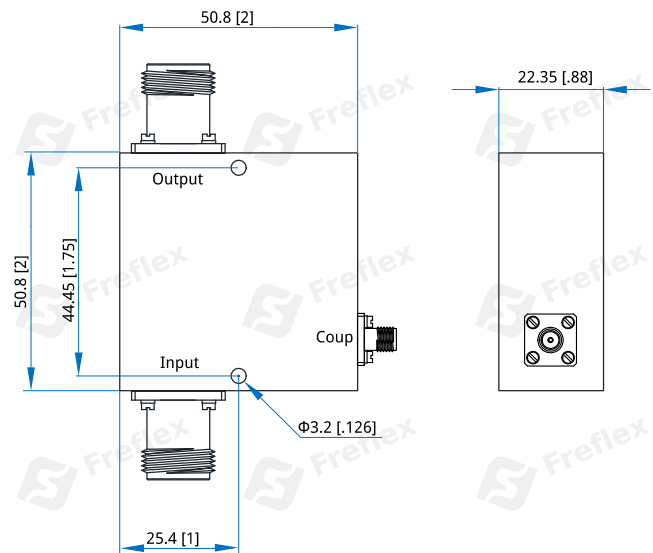

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FSDC-10-500-50-30-NS**

Customization is available upon request.