

## FSDC-100-550-K1-25-S

100~550MHz, 100W, 25dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	100~550MHz
Insertion Loss:	0.3dB max.
Coupling:	25±1dB
VSWR(Mainline):	1.25 max.
Average Power:	100W

### Mechanical


Size <sup>*1</sup> :	50.8*50.8*22.35mm 2*2*0.88in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

### Outline Drawings

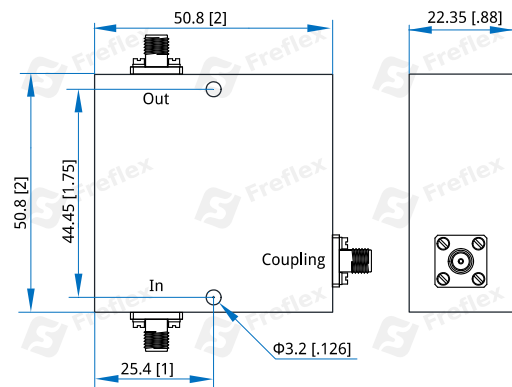

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FSDC-100-550-K1-25-S**

Customization is available upon request.