

FSDC-1000-18000-50-20-S

1~18GHz, 50W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1~18GHz
Insertion Loss:	1.2dB max.
Coupling:	20±1dB
Coupling Flatness:	±1dB max.
Directivity:	12dB min.
VSWR:	1.6 max.
Average Power:	50W max.

Mechanical


Size ^{*1} :	73*15*11mm 2.874*0.591*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

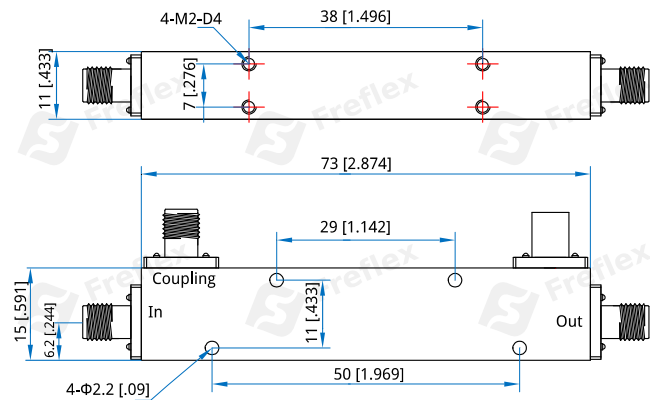

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FSDC-1000-18000-50-20-S

Customization is available upon request.