

FSDC-17000-22000-30-20-S

17~22GHz, 30W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	17~22GHz
Insertion Loss:	1dB max.
Coupling:	20±1dB max.
Directivity:	14dB min.
VSWR:	1.5 max.
Average Power:	30W
Impedance:	50Ω

Mechanical


Size ^{*1} :	28*15*11mm 1.102*0.591*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.3mm through-hole

[1] Exclude connectors

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

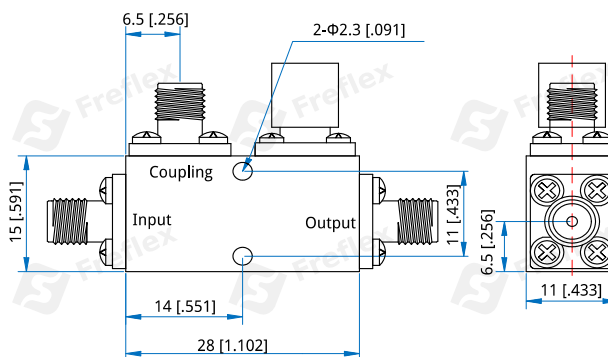

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FSDC-17000-22000-30-20-S

Customization is available upon request.