

FSDC-18000-40000-30

18~40GHz, 30W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	18~40GHz
Insertion Loss:	1.0dB max. 1.6dB max.(10dB) 1.1dB max.(20dB)
VSWR:	1.6 max.
Directivity:	10dB min. 12dB min.(20dB)
Coupling:	10±1, 20±1, 30±1.2dB
Coupling Flatness:	±0.9dB max. ±1.0dB(30dB)
Impedance:	50Ω
Average Power:	30W

Mechanical

Connectors:	2.92mm Female
Mounting:	Φ2.3mm through-hole

Environmental

Temperature:	-45~+85°C
--------------	-----------

How To Order

FSDC-18000-40000-30-X-Y

X: Coupling: 10, 20, 30

10, 20dB - Outline A

30dB - Outline B

Y: Connector type

Connector naming rules:


K - 2.92mm Female

Examples:


To order a single directional coupler, 18~40GHz, 30W, 10dB, 2.92mm female, specify FSDC-18000-40000-30-10-K.

Customization is available upon request.

Outline Drawings

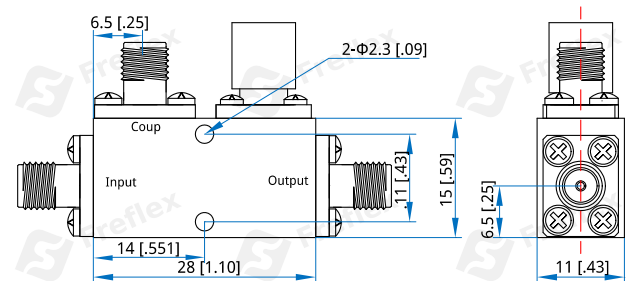

Outline A

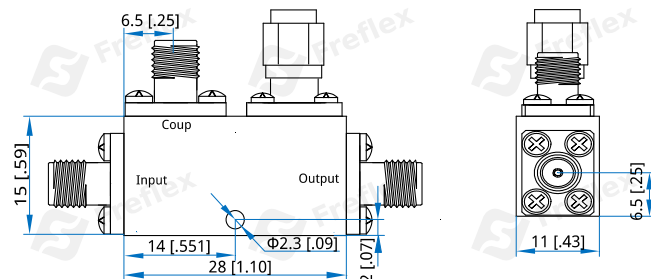

Outline B

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]