

FSDC-2000-67000-10-16-V

2~67GHz, 10W, 16dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~67GHz
Insertion Loss:	3.5dB max.
VSWR:	2 max.
Directivity:	8dB min.
Coupling:	16±4dB
Impedance:	50Ω
Average Power:	10W

Mechanical


Size ^{*1} :	62.9*15*11mm 2.48*0.59*0.43in
Connectors:	1.85mm Female
Mounting:	3-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings

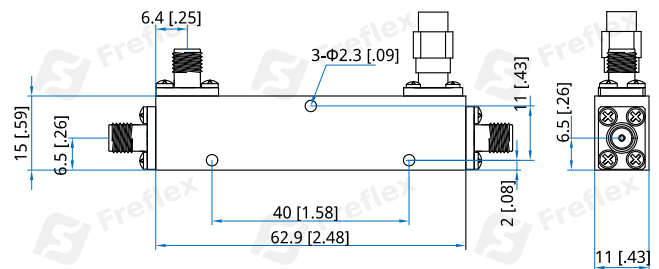

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FSDC-2000-67000-10-16-V

Customization is available upon request.