

FSDC-2000-67000-12-20-V

2~67GHz, 12W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~67GHz
Directivity:	7dB min.
Impedance:	50Ω
Average Power:	12W max.
Peak Power:	1000W max.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)	Coupling Flatness (±dB max.)
20±1.3	2.8	1.9	1.3


Mechanical

RF Connectors:	1.85mm Female
Coupling Connectors:	1.85mm Female
Mounting:	2-Φ2.6mm through-hole

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

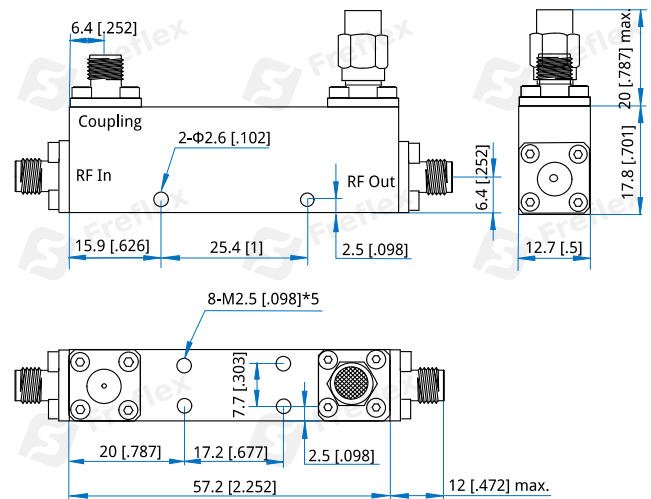

Unit: mm [in]

Tolerance: .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

FSDC-2000-67000-12-20-V

Customization is available upon request.