

FSDC-2000-8000-10-10-N

2~8GHz, 10W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~8GHz
Insertion Loss:	0.8dB max.
Coupling:	10±1.0dB
Directivity:	15dB min.
VSWR (Mainline):	1.25 max.
VSWR (Coupling):	1.25 max.
Average Power:	10W
Impedance:	50Ω

Mechanical


Size ^{*1} :	53*20*20mm 2.087*0.787*0.787in
Connectors:	N female
Mounting:	3-Φ3.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

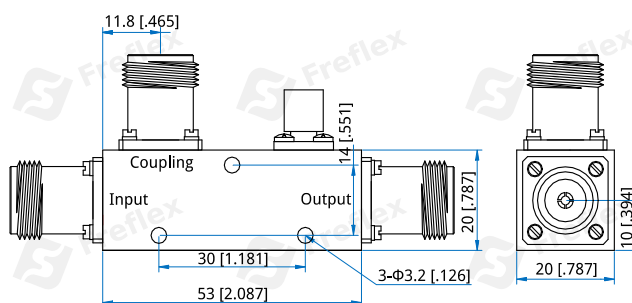

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FSDC-2000-8000-10-10-N

Customization is available upon request.