

FSDC-300-800-50-30-S

0.3~0.8GHz, 50W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.3~0.8GHz
Insertion Loss:	0.3dB max.
VSWR:	1.2 max.
Directivity:	10dB min.
Coupling:	30±1dB
Impedance:	50Ω
Average Power:	50W

Mechanical


Size ^{*1} :	180*15*11mm 7.708*0.59*0.43in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-35~+75°C
--------------	-----------

Outline Drawings

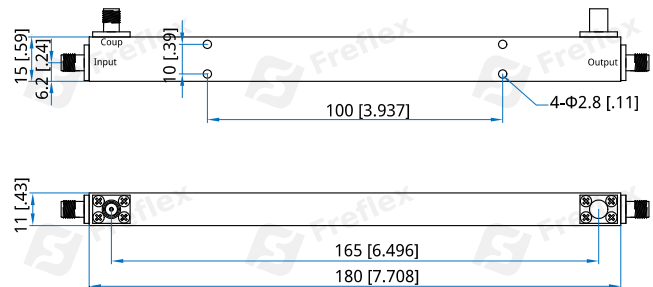

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FSDC-300-800-50-30-S

Customization is available upon request.