

FSDC-375-6000-30-30-S

0.375~6GHz, 30W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.375~6GHz
Insertion Loss:	0.5dB max.
VSWR:	1.25 max.
Directivity:	18dB min.
Coupling:	30±1.6dB
Coupling Flatness:	±1.0dB
Average Power:	30W

Mechanical


Size ^{*1} :	112*17*12.7mm 4.45*0.67*0.5in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

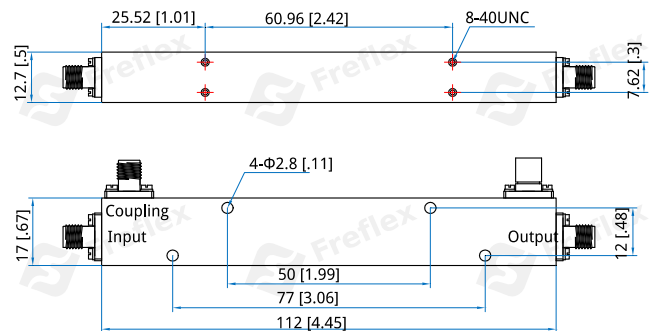

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FSDC-375-6000-30-30-S

Customization is available upon request.