

FSDC-400-20000-10-10-S

0.4~20GHz, 10W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.4~20GHz
Insertion Loss:	2.5dB max.
Coupling:	10±1.5dB
Directivity:	10dB min.@0.4~16GHz 8dB min.@16.1~20GHz
VSWR:	1.7 max.
Average Power:	10W
Impedance:	50Ω

Mechanical

Size ^{*1} :	115*15.5*11mm 4.528*0.61*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole 4-M2, depth 5mm

[1] Exclude connectors and terminations.

Outline Drawings

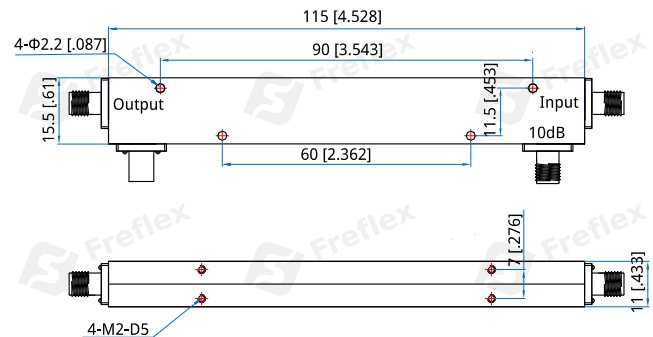

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FSDC-400-20000-10-10-S

Customization is available upon request.