

## FSDC-400-2700-K2-40-N

0.4~2.7GHz, 200W, 40dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	0.4~2.7GHz
Insertion Loss:	0.5dB max.
Coupling:	40±1.5dB max.
Coupling Flatness:	±1.2dB
Directivity:	20dB min.
VSWR(Mainline):	1.5 max.
Average Power:	200W max.

### Mechanical


Size <sup>*2</sup> :	50*50*26mm 1.969*1.969*1.024in
Connectors:	N Female
Mounting:	2-Φ3.8mm through-hole

[2] Exclude connectors and terminations.

### Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

### Outline Drawings

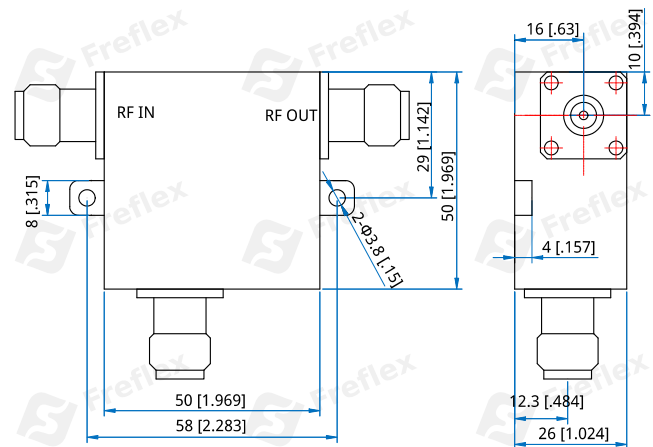

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FSDC-400-2700-K2-40-N**

Customization is available upon request.