

FSDC-400-3900-K15-15-NS

0.4~3.9GHz, 150W, 15dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.4~3.9GHz
Insertion Loss:	0.5dB max.
Coupling:	15±1.5dB
Directivity:	16dB min.
VSWR:	1.25 max.
Average Power:	150W max.

Mechanical

Size ^{*1} :	113*25*20mm 4.449*0.984*0.787in
Connectors:	N Female, SMA Female
Mounting:	2-Φ3.5mm through hole

[1] Exclude connectors and terminations.

Outline Drawings

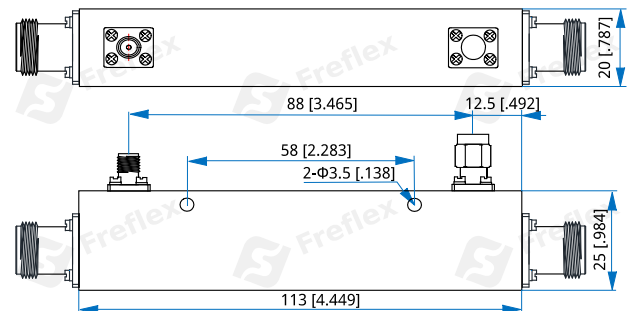

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FSDC-400-3900-K15-15-NS

Customization is available upon request.