

FSDC-400-4200-K2-39-N

0.4~4.2GHz, 200W, 39dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.4~4.2GHz
Insertion Loss:	0.35dB max.
Coupling:	39±1.8dB
Directivity:	12dB min.
VSWR (Mainline):	1.3 max.
IM3:	120dBc min..
Average Power:	200W max.

Mechanical

Size ^{*1} :	48*42*28mm 1.89*1.654*1.102in
Connectors:	N Female

[1] Exclude connectors and terminations.

Outline Drawings

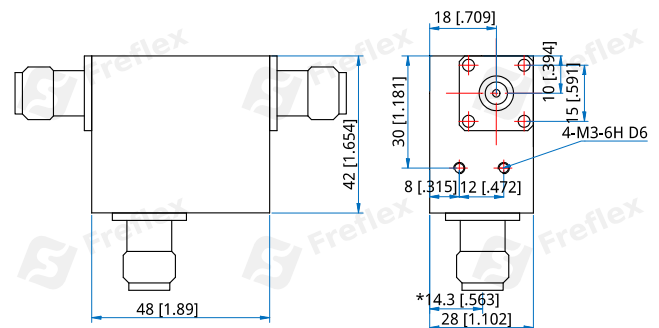

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FSDC-400-4200-K2-39-N

Customization is available upon request.