

FSDC-500-3000-K5-60-NS

0.5~3GHz, 500W, 60dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~3GHz
Insertion Loss:	0.4dB max.
Coupling:	60±2dB
Coupling Flatness:	±1.5dB typ.
Directivity:	16dB min.
VSWR (Mainline):	1.4 max.
Average Power:	500W max.

Mechanical


Size ^{*1} :	50*44*26mm 1.969*1.732*1.024in
RF Connectors:	N female, SMA female
Mounting:	3-Φ5mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

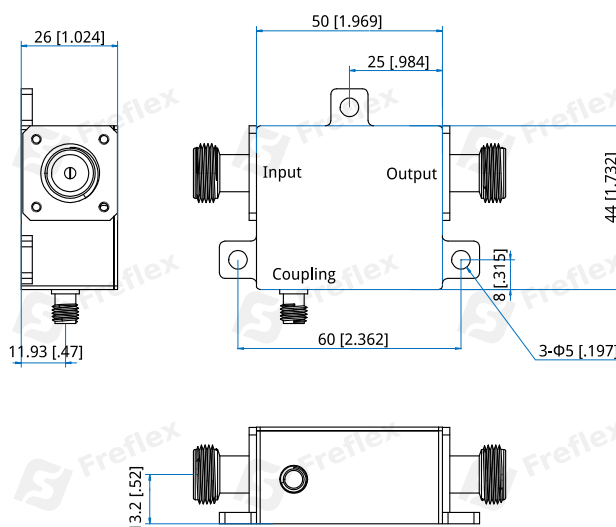

Unit: mm [in]



Tolerance: ±0.3mm [±0.012in]

How To Order

FSDC-500-3000-K5-60-NS


Customization is available upon request.

Typical Performance Curves

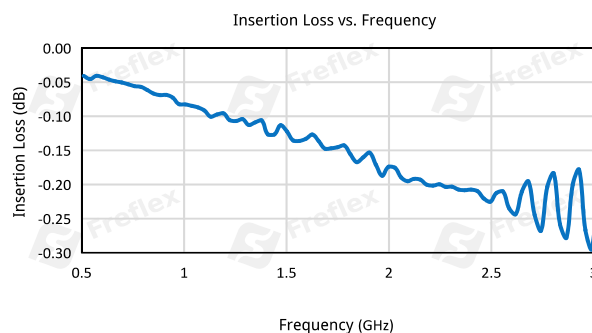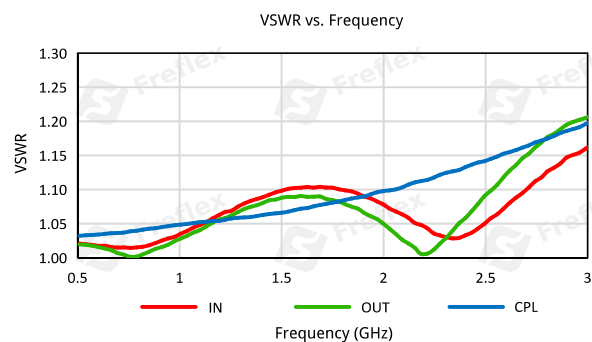

Single Directional Coupler

Coupling vs. Frequency

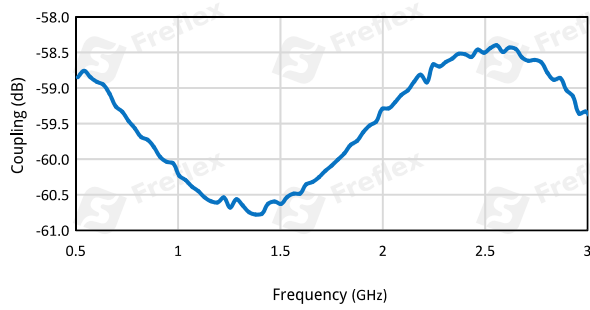

Directivity vs. Frequency

