

## FSDC-600-3000-K2-20-N

0.6~3GHz, 200W, 20dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	0.6~3GHz
Insertion Loss:	0.3dB max.
Coupling:	20±1dB
Coupling Flatness:	±0.7dB max.
Directivity:	18dB min.
VSWR (Mainline):	1.3 max.
VSWR (Coupling):	1.3 max.
Average Power:	200W
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	155*40*22mm 6.102*1.575*0.866in
Connectors:	N female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

### Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

### Outline Drawings

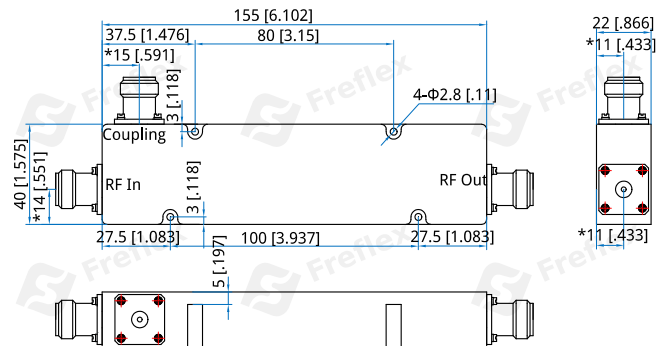

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in], \*Ensure dimensions for design.

### How To Order

**FSDC-600-3000-K2-20-N**

Customization is available upon request.