

FSDC-600-3900-50-10-S

0.6~3.9GHz, 50W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.6~3.9GHz
Insertion Loss:	0.5dB max.
VSWR:	1.2 max.
Directivity:	18dB min.
Coupling:	10±1.5dB
Impedance:	50Ω
Average Power:	50W

Mechanical

Size ^{*1} :	113*15*11.2mm 4.449*0.591*0.441in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

Outline Drawings

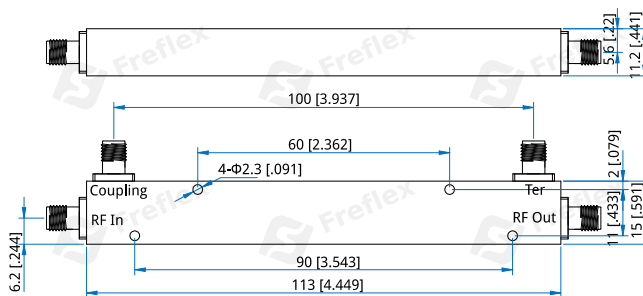

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FSDC-600-3900-50-10-S

Customization is available upon request.