

## FSDC-6500-11500-20-20-S

6.5~11.5GHz, 20W, 20dB

### Features:

- \* Broadband
- \* High Power
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	6.5~11.5GHz
Insertion Loss:	1dB max.
Coupling:	20±1dB
Directivity:	12dB min.
VSWR:	1.5 max.
Average Power:	20W

### Mechanical

Size <sup>*1</sup> :	33*15*11mm 1.299*0.591*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.2mm through-hole 2-M2, depth 5mm

[1] Exclude connectors and terminations.

### Outline Drawings

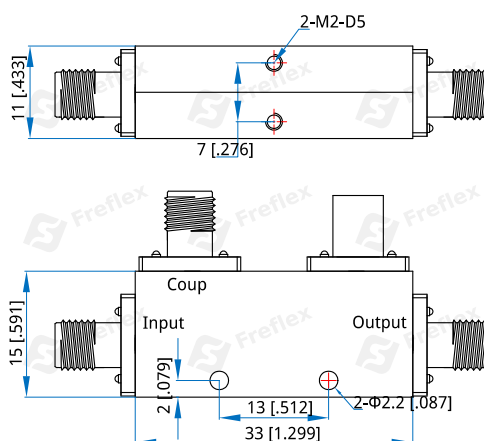

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FSDC-6500-115000-20-20-S**

Customization is available upon request.