

FSDC-80-1000-1K-60-NS

80~1000MHz, 1KW, 60dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	80~1000MHz
Insertion Loss:	0.3dB max.
Coupling:	60±1dB
Coupling Flatness:	±1dB max.
Directivity:	18dB min.
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.6 max.
Average Power:	1KW

Mechanical


Size ^{*1} :	55*48*22mm 2.165*1.89*0.866in
Connectors:	N Female, SMA Female
Mounting:	4-Φ5mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

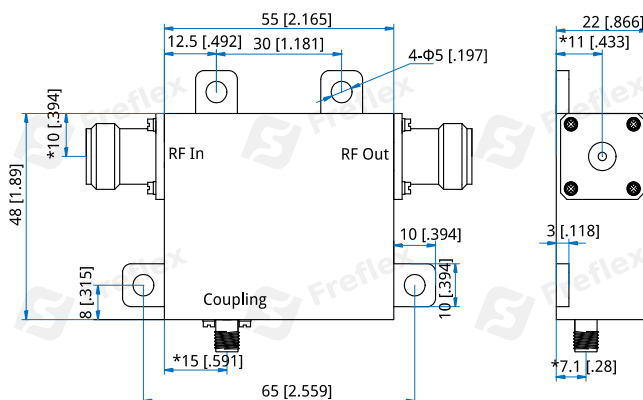

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in], *Ensure dimensions for design.

How To Order

FSDC-80-1000-1K-60-NS

Customization is available upon request.