

FSDC-8000-18000-10-10-N

8~18GHz, 10W, 10dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	8~18GHz
Insertion Loss:	1dB max.
Coupling:	10±1.2dB
Directivity:	12dB min.
VSWR (Mainline):	1.5 max.
VSWR (Coupling):	1.5 max.
Average Power:	10W
Impedance	50Ω

Mechanical


Size ^{*1} :	39*20*20mm 1.535*0.787*0.787in
Connectors:	N Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

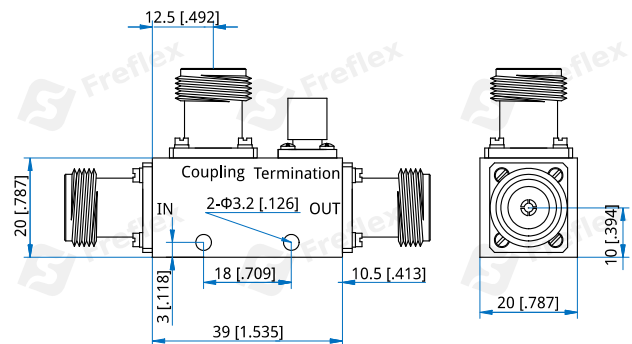

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FSDC-8000-18000-10-10-N

Customization is available upon request.